

DATA SHEET 21.9




External view with entrance footboard



Internal view



Internal view

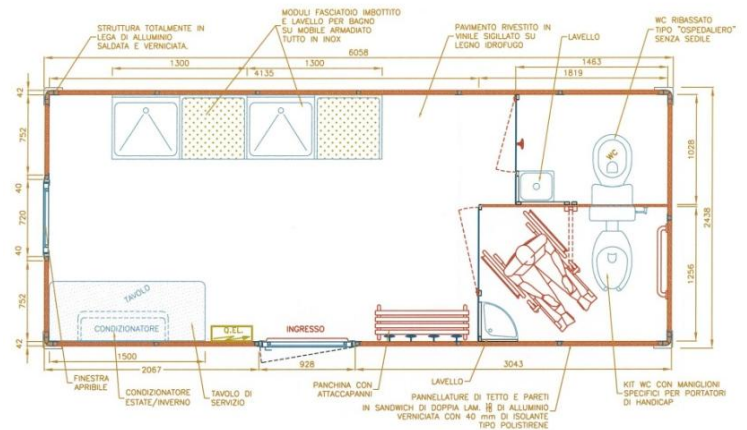

Overall view/plan in operational formation with standard set up

Mobile medical container: Nursery unit with toilets - Iso 20ft

MOD. CON20AL-NY1-M2

- | | |
|---|--|
| <p>a) Sizes suitable for transport on lorries with bed suitable for containers ISO 20'-1CC.</p> <p>b) Sturdy support structure in extruded-moulded aluminium profiles (L. 5754)</p> <p>c) Plastic (rubber or vinyl flooring) on waterproof multi-layer wood.</p> <p>d) External curtain wall in varnished 10/10 double aluminium sheet sandwich panels, with 40 mm thick polystyrene insulation.</p> <p>e) Entrance with door on long side;</p> <p>f) Internal partitions for formation of two toilet areas.</p> <p>g) All the aluminium door and window frames with polycarbonate "glass" (or safety glass) and panic bar at the entrance; curtains for privacy on all glass;</p> <p>h) Lifting with ½ crane on corner blocks ISO or forking on standard pockets.</p> <p>i) External paint can be chosen from RAL catalogue.</p> <p>j) Dimensions in mm. and weight:</p> <ul style="list-style-type: none"> • closed 6058 x 2438 x 2591 (ISO 20'-1CC std) • total weight approx. Kg 2800.- | <ol style="list-style-type: none"> 1. Electricity from 230V external source, on external EEC plug/socket with prepared cable, with a grounding system with connection and relevant rods. 2. Internal electrical control panel for branches with standard safety devices and distribution on lights and perimeter sockets. 3. LED or Neon lighting on request. 4. Basic equipment with: <ul style="list-style-type: none"> • 1 table 600 x 1500; • 2 paediatric modules with changing table/bath for infants, covered in stainless steel. • 2 stainless steel presses or alternatively 4 stainless steel shelves; • bench and coat rack or shelves; • 2 toilets for children, one of which with specialist use for the disabled, with accessories; • CO₂ extinguisher. 5. 1 mono-block air conditioning unit, summer/winter type with approx. 12000 Btu/h. 6. 1 ceiling electrical fan (porthole type) with dual effect (In/Out) and speed regulation + 1 additional 1500 W fan heater. 7. Set up time for "ready state": approx. 10 min., with 2-3 staff trained in advanced (simulation). 8. Veranda (cover+ 2 ends + sides) approx. 5750 x 2000 with support hardware, to protect the entrance area. |
|---|--|

Prices: Ex-works Guaro - Italy

MOD. CON20AL-NY1-M2 (including all basic equipment listed):.....Euro/each _____ + VAT -