




DATA SHEET 22.2



View/plan view of the unit

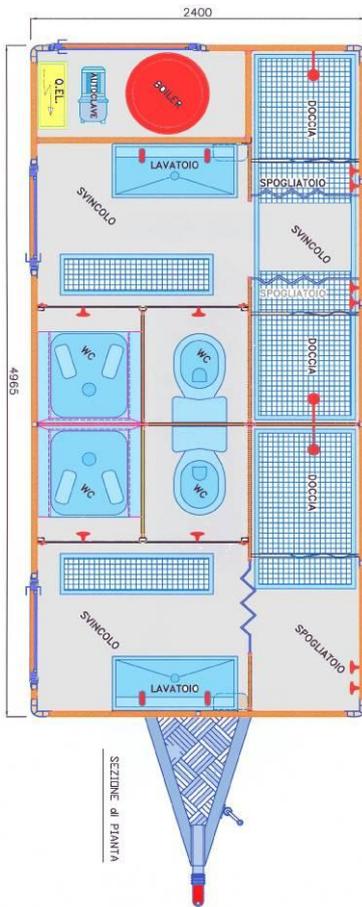

Interior details: entrance/exit – stall with "Turkish" toilet – stall with "standard" toilet



View of the unit, entrance side, set on the ground

Mobile Shower and Toilet facilities on trailer

MOD. CAR-SIX-UD-2LM

MOD. CAR-SIX-UD-43-1LM

- | | |
|--|---|
| <ul style="list-style-type: none"> a) Sturdy supporting structure with aluminium section bars obtained from press-formed L. 6082 sheets and/or extruded shaped sheets, welded at the joints to form a self-supporting, free standing unit. b) Transportable by a trolley/trailer with a load capacity of 25 q., or by standard vehicles with a loading platform large enough for the overall dimensions indicated below. c) Access platforms and steps, completely made in aluminium, detachable from the structure. d) Stainless steel, non-skid floor on waterproof, multi-layer wood support. e) Shower hob in electro-welded galvanized grid over stainless steel floor-set tubs. f) Insulated aluminium partitions and stratified laminated doors. g) External curtain walls with sandwich panels in 1/10 double aluminium sheets coated with 40mm polyurethane insulation. h) Exterior aluminium door and window frames with polycarbonate "glass" and panic bars on doors. i) Different entrances for men and women, and separate technical compartment with a wide aluminium door, ventilated and locked. j) Can be used on board a vehicle or set on the ground. k) Front awning and/or veranda to cover the user access area. l) Custom paint and finishing work for higher visibility. m) Nominal size of freestanding unit (in mm.): length 5000 x width 2400 x height 2300 (as for flatbed trailer). | <ul style="list-style-type: none"> 1. Sturdy supporting structure with aluminium section bars obtained from press-formed L. 6082 sheets and/or extruded shaped sheets, welded at the joints to form a self-supporting, free standing unit. 2. Transportable by a trolley/trailer with a load capacity of 25 q., or by standard vehicles with a loading platform large enough for the overall dimensions indicated below. 3. Access platforms and steps, completely made in aluminium, detachable from the structure. 4. Stainless steel, non-skid floor on waterproof, multi-layer wood support. 5. Shower hob in electro-welded galvanized grid over stainless steel floor-set tubs. 6. Insulated aluminium partitions and stratified laminated doors. 7. External curtain walls with sandwich panels in 1/10 double aluminium sheets coated with 40mm polyurethane insulation. 8. Exterior aluminium door and window frames with polycarbonate "glass" and panic bars on doors. 9. Different entrances for men and women, and separate technical compartment with a wide aluminium door, ventilated and locked. 10. Can be used on board a vehicle or set on the ground. 11. Front awning and/or veranda to cover the user access area. 12. Custom paint and finishing work for higher visibility. 13. Nominal size of freestanding unit (in mm.): length 5000 x width 2400 x height 2300 (as for flatbed trailer). 14. Trolley/trailer approved for standard "transportation of goods", 2 axles and ball hitch, with 2500 kg capacity. |
|--|---|

Prices: Ex-Works Gruaro - Italy

1. Mod. Car-SIX-UD-2LM (as described, with: 3 showers + 4 WCs + 2 washbasins): Euro/each. _____ + V.A.T.-
2. Mod. CAR-SIX-UD-43-1LM (as described, with: 3 + 4 WCs + 2 washbasins): Euro/each. _____ + V.A.T.-
3. TRAILER EXCLUDED

