




DATA SHEET 23.9



View/plan view of the unit in operation

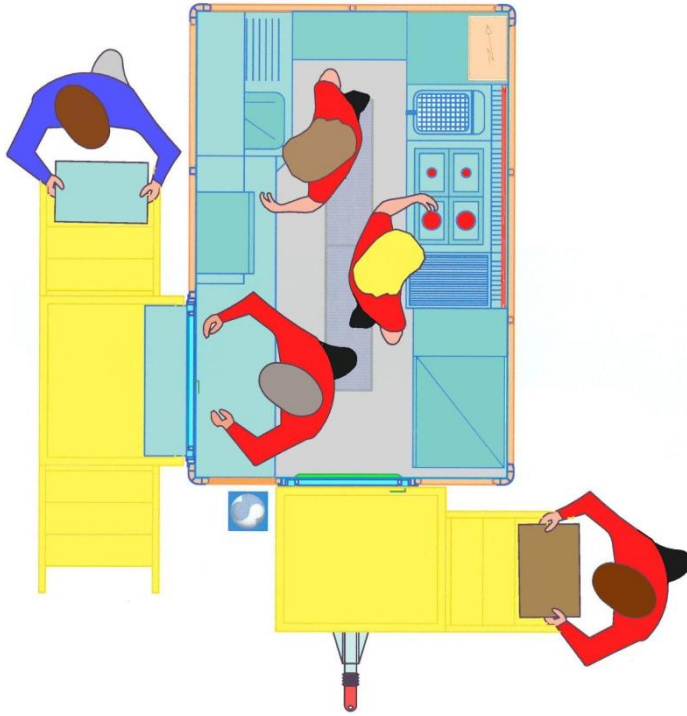

View/plan of the unit in operating position



Interior view of equipment

Mobile Kitchen Unit on Trailer

MOD. CARCUC3/2-50A

- | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> a) Sturdy supporting structure with aluminium section bars obtained from press-formed L. 6082 sheets and/or extruded shaped sheets, welded at the joints to form a self-supporting, freestanding unit. b) Transportable by a trailer with an overall load capacity of 18 or 20 q, or by standard vehicles with a loading platform large enough for the overall dimensions indicated below. c) Platforms and steps for access and/or distribution to customers outside the unit, detachable from the unit. d) Stainless steel sheet floor with non-skid strips on waterproof, multi-layer wood support. e) Cooking area wall covering, with ventilated stainless steel wall panel. f) Curtain walling with sandwich panels in 10/10 double aluminium sheets coated with 40 mm polystyrene insulation. g) Aluminium door and window frames with safety glass and panic bar on the door. h) Staff entrance on the shorter side of the unit, separate from the customer distribution area, located on the longer side. i) Can be used on board a vehicle or set on the ground (set down from the trailer). j) Awning (on the side) providing shelter to the distribution area and awning for entrance area k) Custom paint and finishing work for higher visibility. l) Standard size of freestanding unit (in mm): length 3000 x width 2030 x height 2250 with an approx. weight of 1050 Kg. (including proposed fitting).- | <ul style="list-style-type: none"> 1. Electric power supply from 230 V external source on external EEC plug. 2. Internal electrical control panel for external branches and safety devices, in compliance with current regulations. 3. External branch on the ramp and internal gas distribution compliant with current regulations. 4. Module equipment includes:
Cooking: fry-top/griddle on cabinet base, one basket fryer, 4 ring stove on electric fan-assisted oven, 1400 ventilation hood with centrifuge motor and washable filters; professional microwave combination oven on request
Distribution/preparation: 400 litre refrigerator cabinet, single basin kitchen sink + drainer; worktops with drawers; cupboard unit and shelf; work/distribution counter. 5. Plumbing system with surge tank pump and/or connection to an external network (or auxiliary tanks) for drinking water + electrical boiler for hot water to the kitchen sink. 6. Ceiling exhaust fan on opening porthole window with thermostatic sensor for exhaust or intake of air at adjustable speed. 7. Grounding system with connection and rods. 8. Set-up time for 'ready state': approx. 30 minutes with trained staff. 9. Productivity: preparation and distribution of approx. 30-80 portions per hour for a complete menu (depending on set-up) also with a continuous cycle. 10. Can be provided with trolley/trailer approved for standard "transportation of goods", 2 axels and ball hitch, with 1800 or 2000 kg capacity |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Prices: Ex-Works Gruaro – Italy

1. MOD. CarCuc3/2-50A (including all equipment listed): Euro/each _____ + V.A.T.

2. TRAILER EXCLUDED

