


DATA SHEET 21.5



Plan of the fully equipped shelter

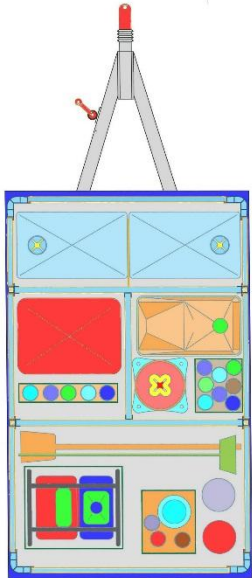

Equipment details



Equipment details



Overall view in transport position



"Open" side view



Detail of rear door

Mobile Auxiliary Units: Pumps-Drainage Systems and Washing-Cleaning for operating Teams

MOD. CAR/US-PSL-BS1/A

- a) **Monolithic shelter** made entirely in welded aluminium (L. 5754), with perimeter doors with key locking and internal partition walls;
- b) can be lifted both using top coupling points and pockets for forklifts;
- c) division of usable volume in spaces suitable for the equipment defined below.
- d) dimensions length 2380 x width 1520 x height 1370;
- e) empty weight approx. 350 Kg.;
- f) positioning on standard commercial trailer, with a 2550 x 1550 platform with usable capacity of 1200 kg.
- g) **Basic features** with:
- h) **nr. 1 generator set** of approx. 3000 W sound-proofed to standard, with sockets, tank, battery, automatic switch-on and wheels for movement;
- i) **1 shunt** and distribution panel for 230 V electrical mains;
- j) **1 light** on adjustable stand, with cable and bulb;
- k) **2 or 4 water tanks** (tot. approx. 150 l) connected both to one another and at the input and at the output, for filling from mains or manually, and pump priming for washing;
- l) **1 professional, hot water high pressure washer**, of 110-130 bar for 7-8 l/min, with an 1.5-1.9 KW. pump, equipped with a tank for detergent, triple adjustable nozzle, swivel jet nozzle, filters, high pressure pipe and other fittings included in the manufacturer's kit;
- m) **removable drawers** for loose materials and/or technical accessories;
- n) free space available for storage of any small tools suitable for service

1. Additional equipment to complete the service:

- **1 motor pump** of 1100 l/min; max. suction height 8 m.; delivery and suction diameter 80 mm., assembled on frame for manual transport, complete with pipes and standard accessories;
 - **1 motor pump** for submerged use in **clear water**, with a flow rate of approx. 15,000 l/h; cables, pipes and standard accessories included;
 - **1 motor pump** for submerged use in **sewage water**, also to drain excavations, with a flow rate of approx. 25,000 l/h, with passage of solid bodies up to 50 mm; cables, pipes and standard accessories included;
 - **1 industrial type vacuum cleaner** for dust and liquids of approx. 1500-1600 W, with a 30 l bin, filters and various accessories for the various functions;
 - **1 shovel** with handle;
 - **1 broom** with telescopic handle;
 - **2 buckets** in polyethylene;
 - **2 tube rolls** in polyethylene 1/2" x approx. 20 m/each;
 - **tube fitting accessories kit**, joint/coupling for mains taps, reducers; all standard market products for easy replacement or re-integration;
 - **1 aluminium ladder**, either foldable or extension type, with 4+4 steps, fitted for coupling to the loading platform.
2. Set-up time for "ready state": approx. 15 min., with trained staff.

Prices: Ex-Works Gruaro - Italy

1. MOD. CAR/US-PSL-BS1/A (as described and including all equipment listed): Euro _____ + VAT.-
TRAILER EXCLUDED

