


DATA SHEET 22.3

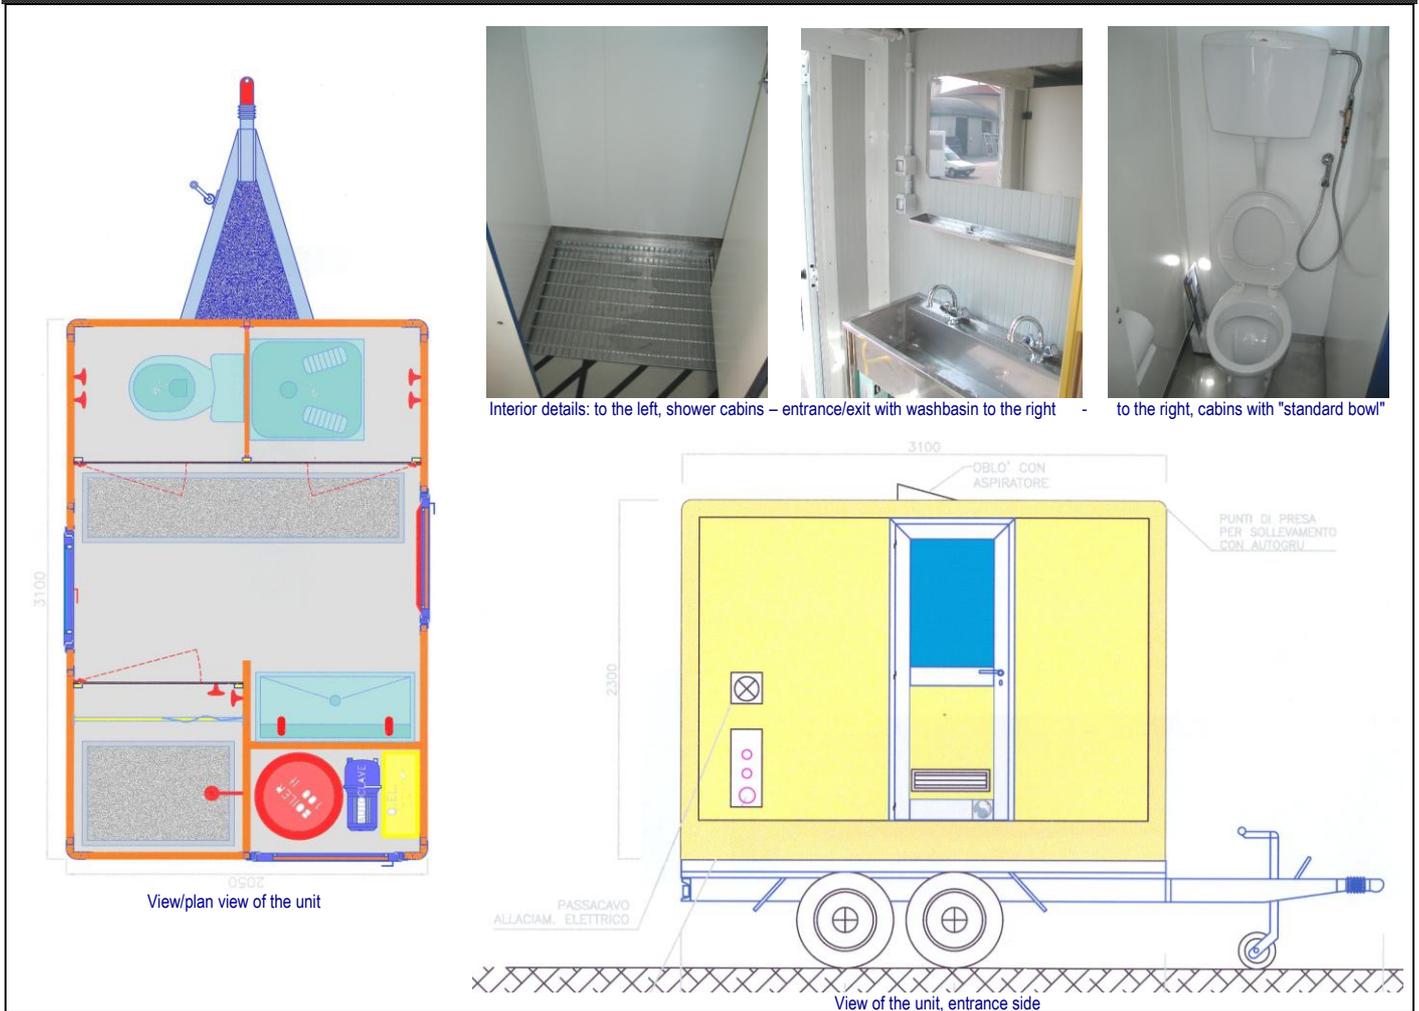

Mini mobile restroom trailer with shower

MOD. CAR-SI/PR-1+2/L

MOD. CAR- SI/PR-3G/L

MOD. CAR- SI/PR-3D/L

- Sturdy supporting structure with aluminium section bars obtained from press-formed L. 6082 sheets and/or extruded shaped sheets, welded at the joints to form a self-supporting, free standing unit.
- Transportable by a trolley/trailer with a load capacity of 15 q., or by standard vehicles with a loading platform large enough for the overall dimensions indicated below.
- Access platforms and steps, completely made in aluminium, detachable from the structure.
- Stainless steel, non-skid floor on waterproof, multi-layer wood support.
- Shower hob in electro-welded galvanized grid over stainless steel floor-set tubs.
- Insulated aluminium partitions and stratified laminated doors.
- External curtain walls with sandwich panels in 1/10 double aluminium sheets coated with 40mm polyurethane insulation.
- Aluminium door and window frames with polycarbonate "glass" and panic bars.
- Single entrance (back side) on internal clearance area for all users, and separate technical compartment with wide aluminium doors, ventilated and locked.
- Can be used on board a vehicle or set on the ground.
- Front awning and/or veranda to cover the user access area.
- Custom paint and finishing work for higher visibility.
- Nominal size of freestanding unit (in mm.): l. 3100 x w 2050 x h 2300 (as for flatbed trailer).
- Trolley/trailer approved for standard "transportation of goods", 2 axes and ball hitch, with 2500 kg capacity.

- Electric power supply from 220 V external source on external EEC plug.
- Internal electrical control panel for external branches and distribution on various lights and sockets, with safety devices in compliance with current regulations.
- Technical compartment accessible from the exterior, with systems equipment and branches.
- "Basic" module (Car-SI/PR-1+2/L) equipment includes:
 - **1 shower:** comprised of a room divided into changing room and shower, complete with accessories, curtain, mirror and shelving.
 - **2 WCs:** free-standing stalls with a ceramic English bowl and a stainless steel Turkish toilet, complete with standard accessories.
 - **1 vestibule/entrance area,** necessary to access the aforementioned stalls, each with a stainless steel washbasin, with 2 faucets, stainless steel mirror, shelving, fan heater, electric hand dryer and standard accessories.
- Plumbing system with surge tank pump and/or connection to an external network + channel drain system; all with quick connections and flexible piping.
- 1 150 litre electric boiler for hot water to showers and sinks, also for outside use.
- 1 electric ceiling fan (porthole) with double effect (In/Out) and speed control.
- Grounding system with connection and rods.
- Set-up time for "ready state": approx. 30 minutes with trained staff.
- Pipes, tanks (on request), sewage release pump (on request) and external connection accessories for branches and drains.

Prices: Ex-Works Gruaro - Italy

- Mod. CAR- SI/PR-1+2/L (as described with: 1 shower cabin + 2 WC cabins and 1 washbasin): **€uro/each** _____ + V.A.T.-
- Mod. CAR- SI/PR-3G/L (as described, but with: 3 WC cabins and 1 washbasin): **€uro/each** _____ + V.A.T.-
- Mod. CAR- SI/PR-3D/L (as described, but with: 3 shower cabins and 1 washbasin): **€uro/each** _____ + V.A.T.-
- TRAILER EXCLUDED**

